



This Nufix Tile grout is a cement based and is perfect to be used for installing wall and floor tiles on both internal and external surfaces. This product can be used to grout wall and floor tiles which have a joint width of about 2mm to 10mm. In order to avoid staining, it is advisable to use only white or grey Tile Grout in case of light coloured, tiles which are unglazed or dully glazed. In case of a doubt, one should first use coloured grout to make a trail and check out how easily it can be cleaned.

- It is water proof and polymer modified.
- Does not leave any stains.
- It is non-shrink and is found in a variety of colors.
- Easy to prepare and apply.

Uses

- It's a water proofing grout for filling of all types of tile joints
- Used for kitchen floors, swimming pools and bath rooms
- Easy to use application and self cured
- Ideal for both internal and external applications

Storage

Nufix Tile Grout is available in 1kg / 500 gms pouches. Stocking life is 12 months. The product should be kept in covered and dry place.

Technical Data Specifications :


Colour	Grey / White / Coloured
Binder	White Cement based
Join width	2-10 mm
Water demand	28%
Compressive Strength	> 5 N/mm ² after 7 days
Pot Life	60 minutes
Consumption	0.8 to 1.5 Kg/m ²

“In order to ensure the durability and strength of your house, it is important to seal the tiles and grout them. It is recommended that the grout be sealed after every tiling process as it adds a protective coat to the tiles.”


Application Procedure

- Tile grouting can be done anytime from 1 to 2 days after the completion of the tiling process.
- The tile grout should be mixed with the recommended amount of water until its converted into a smooth paste.
- Once the mixture is ready, it should be allowed to sit for about 10 to 12 minutes. After this, the mixture should be mixed again and then used.
- Tile grout should be applied using a rubber trowel.
- The right way to apply grout to the tiles is to apply it diagonally and press it firmly into the joints, such that these are properly filled in. Any grout in excess should be duly removed.
- Once the grout is applied, give it at least 20 to 30 minutes so that it dries completely. However, this depends upon the temperature, climate and humidity of the area and may vary. Then, dampen a sponge and use it to clean the surface of the tile.
- When cleaning the tiles and tile joints after grouting, it is crucial that very little water be used.
- In case of unglazed tiles, cleaning can be made easier by moistening the tiles with a damp sponge prior to the grouting process.
- Before the tile is wiped for a final time, it is important to let the surface of the tile to dry. In areas that are extremely dry, even curing of tiles may be needed.

Note: Technical data sheet is for general information only. NUGEL Industries Private Limited has the right to modify the contents of the data sheet any time.

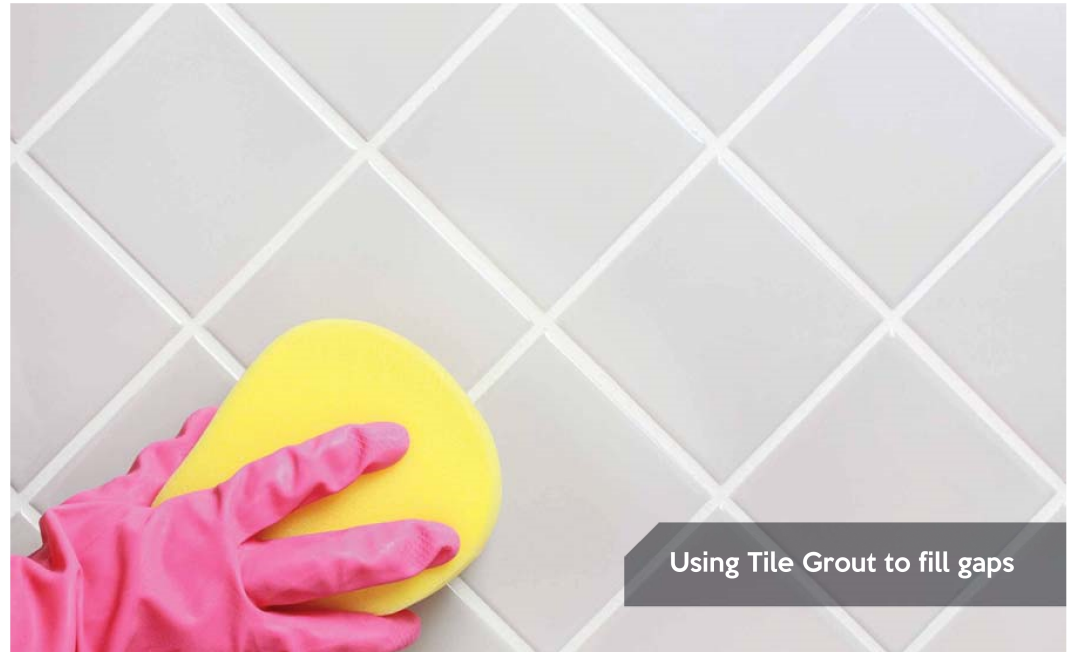

Using Tile Grout to fill gaps

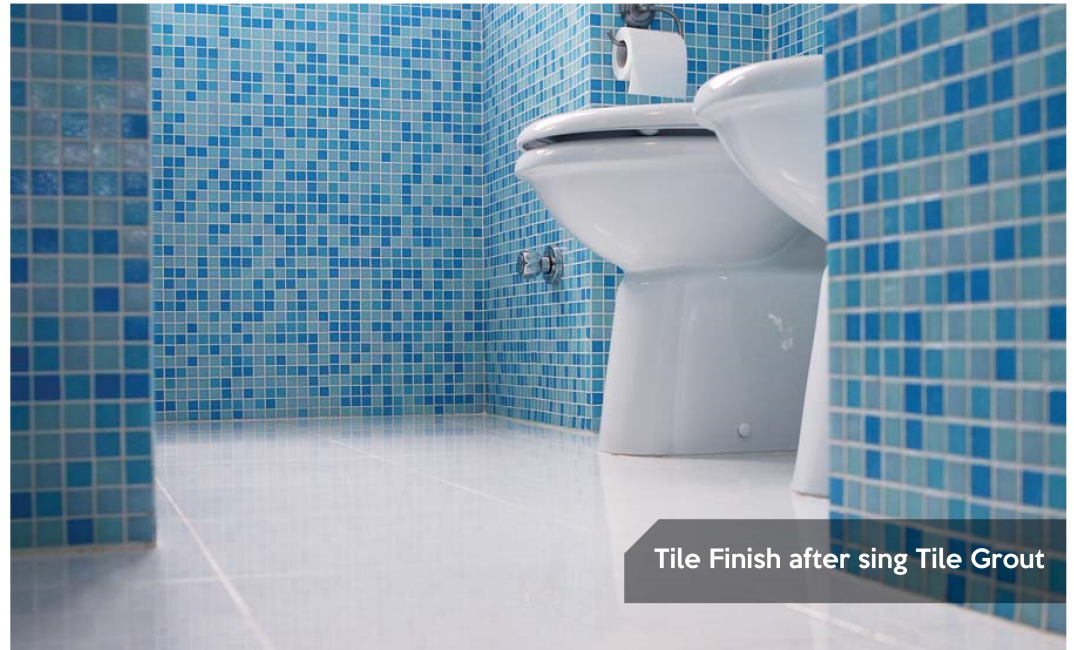

Tile Finish after sing Tile Grout